

Description

PA Transfer Air Grille (Model: TAG) is designed for Transfer Air application for ACMV Systems. It is suitable for wall mounted. Besides standard constructed from extruded aluminium, stainless steel material is available upon request. Finishing for TAG is standard powder coated in white colour, other colours are available upon request.

Installation Guideline

1. Opening Clearance

The hole opening on the wall shall be larger than the combination of the TAG's neck to permit the installation of the system and the gap should be within 5mm of the overall size of the TAG's neck and its accessories combination.


2. Installation Detail

A. Countersunk Screw Mounting (For Wall Mounted)


After insert the TAG into the opening hole, direct secure the TAG with the use of an M5 countersunk screw on the frame of the TAG tighten it until the surface of the TAG is flush with the ceiling or wall.

B. Concealed Mounting (For Wall Mounted)

A ledge must be added for installing bracket in either drywall, sheet metal or angle form. After insert the TAG into the opening hole, secure the TAG into the bracket with use of an M5 self-tapping screw and tighten it until the surface the surface of the TAG is flush with the ceiling or wall

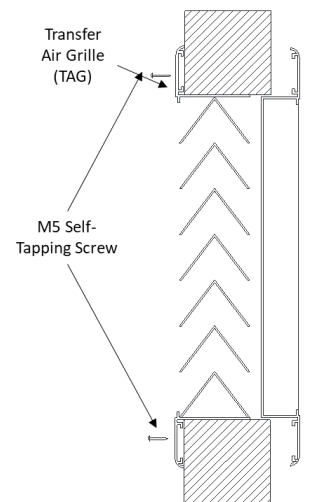

Countersunk Mounting

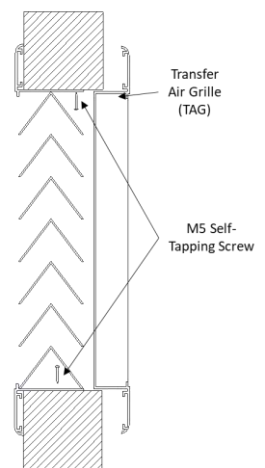

Concealed Mounting